WALRUS PUMP

PK Series

Fishpond Submersible Pump



Better Life
Through Innovation

PK Series Fishpond Submersible Pump



50 Hz

Power: 150 W
Head: Up to 6 M
Flow: Up to 220 L/min
Outlet: 2"

60 Hz

Power: 100 ~ 250 W
Head: Up to 6.5 M
Flow: Up to 260 L/min
Outlet: 1" or 2"



Product Features

- High efficiency motor.
- Motor with thermal overload protector.
- Pump body is made of engineering plastic.


Applications


- Circulating water in fish ponds.
- Fountain.
- Waterfall.
- Lifting water from tanks.

Operating Conditions

- Insulation class: B
- Protection: IP68
- Length of cable: 4 or 5 M
  10 M (Optional)
- Liquids Temperature: 4°C ~ +35°C
- Min.Submerged depth: 12 ±1 cm
- Solids Passage : 20 mm

Performance Curve

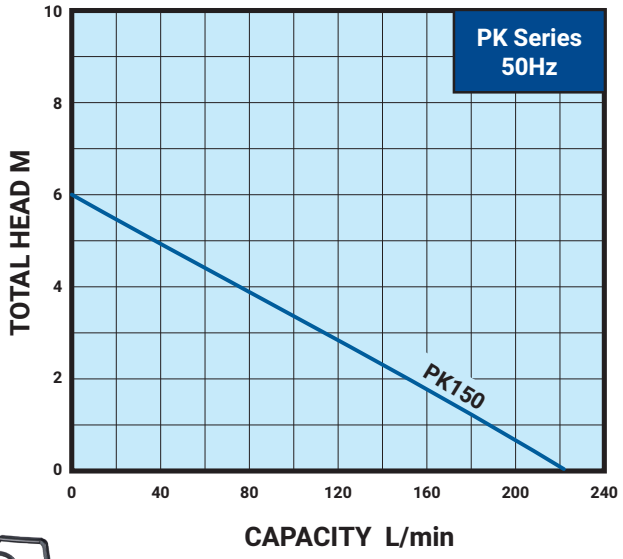

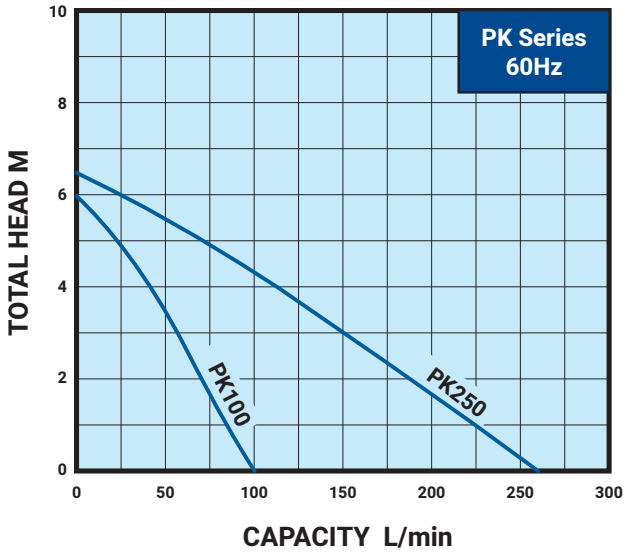



PK Series 50Hz

Model	Outlet In.	Output W	Cycle Hz	Volt V	Amp's A	H max. m	Q max. L/min	Dimensions L x W x H (mm)	Cable Wire C x mm² x m	N.W. kg	G.W. kg	
PK150	2"	150	50	220 - 240	1.7 - 1.6	6	220	221 x 151 x 365	3 x 1.5 x 5	6.1	6.6	50



PK Series 60Hz

Model	Outlet In.	Output W	Cycle Hz	Volt V	Amp's A	H max. m	Q max. L/min	Dimensions L x W x H (mm)	Cable Wire C x mm² x m	N.W. kg	G.W. kg	
PK100	1"	100	60	110 / 220	2.0 / 1.0	6	100	155 x 140 x 267	3 x 0.75 x 4	4.2	4.6	72
PK250	2"	250	60	110 / 220	4.0 / 2.0	6.5	260	221 x 151 x 365	3 x 1.25 x 5	6.2	6.7	50

WALRUS PUMP

WALRUS PUMP CO., LTD.

Head office: No.83-14, Dapiantou, Sanzhi Dist.,
New Taipei City 252, Taiwan
Tel: (+886) 2 2636-1123~7
Fax: (+886) 2 8635-2660
Email: walrus.sales@walrus.com.tw

All specifications are subject to change without notice. PK-EN001a-202306

bsi. ISO 9001 品質管理系統

Walrus Pump 2.0 RoHS