WALRUS PUMP

TH Series

Atomize Pump



Better Life
Through Innovation

TH Series Atomize Pump



50 Hz

Power: 0.25 - 0.37 kW
Head: Up to 30 kg/cm²
Flow: Up to 7.5 L/min
Outlet: ¼"

60 Hz

Power: 0.25 - 0.37 kW
Head: Up to 30 kg/cm²
Flow: Up to 8.5 L/min
Outlet: ¼"



Product Features

- Portable compact design, easy to carry.
- Easy operation, and maintenance.
- High pressure discharge head, and large capacity.
- Powerful electrical motor,high reliability.
- Suitable for agricultural spraying.
- Self priming suction function.

Applications

- Household and industrial washing and cleaning.
- High pressure water supplying.
- Garden and agricultural chemicals spraying.
- Hydraulic piping leakage testing.

Maximum output pressure

- TH400P - 30 kg/cm²
- TH250P - 20 kg/cm²

Optional Accessories




Hydraulic testing kit
(pressure gauge, valve and high pressure hose pipe).

Standard Accessories



- Suction hose pipe with inlet filter.
- High pressure hose (30 ft.)
- Overflow hose.
- Spray gun.

Sprayer Components

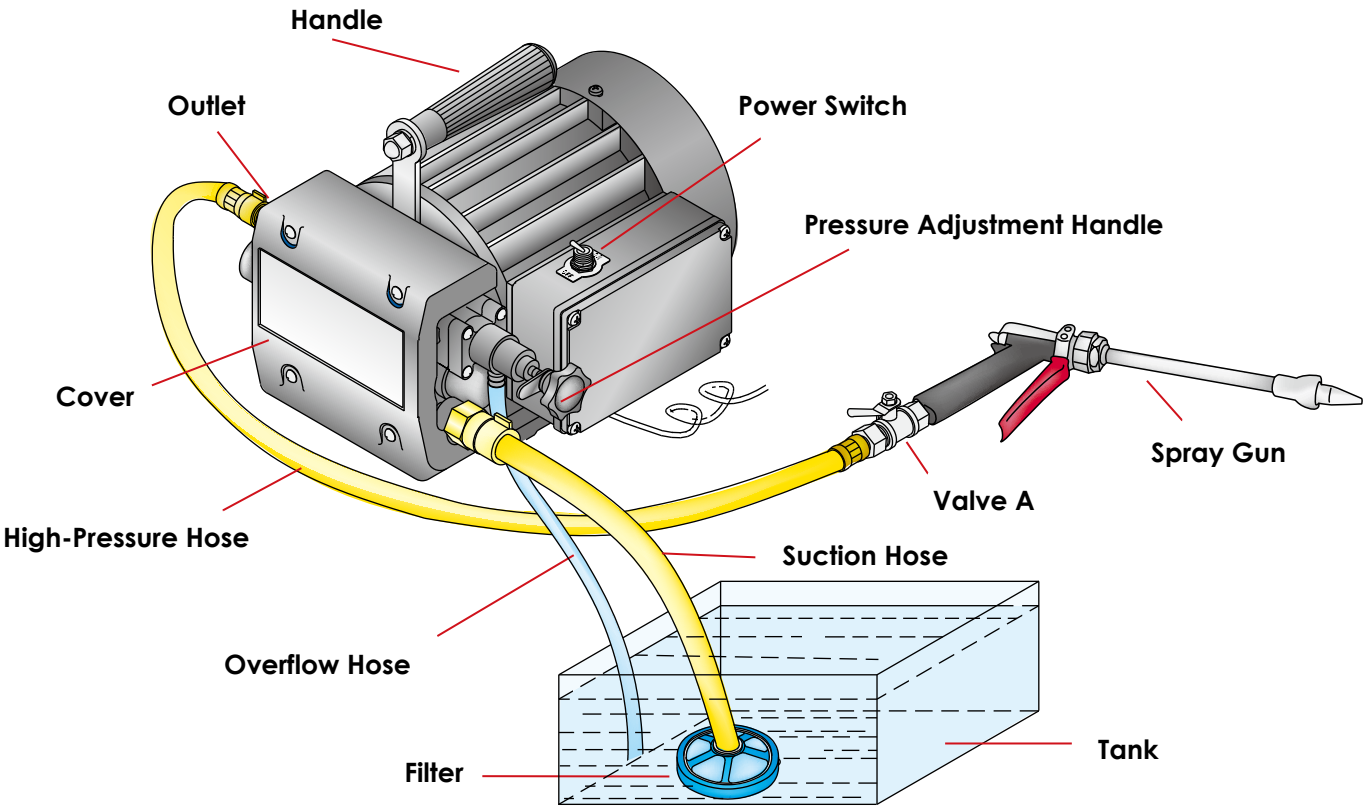



TH Series 50Hz

Model	Output kW	Cycle Hz	Pole P	Voltage Single V	Amp's A	Pressure kg/cm²	Capacity L/min	Box Outline L x W x H mm	N.W. kg	G.W. kg	
TH250P	0.25	50	4	200 - 240	2.0	20	7.5	403 x 287 x 270	11.8	12.2	24
TH400P	0.37	50	4	200 - 240	4.4	30	7.5	403 x 287 x 270	14.2	15.1	24



TH Series 60Hz

Model	Output kW	Cycle Hz	Pole P	Voltage Single V	Amp's A	Pressure kg/cm²	Capacity L/min	Box Outline L x W x H mm	N.W. kg	G.W. kg	
TH250P	0.25	60	4	110 / 220	6.0 / 3.0	20	8.5	403 x 287 x 270	11.8	12.2	24
TH400P	0.37	60	4	110 / 220	10 / 5.0	30	8.5	403 x 287 x 270	14.2	15.1	24

WALRUS PUMP

WALRUS PUMP CO., LTD.

Head office : No.83-14, Dapiantou, Sanzhi Dist.,
New Taipei City 252, Taiwan
Tel : (+886) 2 2636-1123~7
Fax : (+886) 2 8635-2660
Email : walrus.sales@walrus.com.tw

All specifications are subject to change without notice. TH-EN003c-202410

bsi. ISO 9001 品質管理系統

Walrus Pump 2.0 RoHS