WALRUS PUMP

TP3_PTB Series

Direct Water Pump



Better Life
Through Innovation

TP3_PTB Series Direct Water Pump



50 Hz

Power: 0.18 - 0.37 kW
Head: Up to 35 M
Flow: Up to 35 L/min
Outlet: ¾" - 1"
Inlet: ¾" - 1"

60 Hz


Power: 0.18 - 0.37 kW
Head: Up to 40 M
Flow: Up to 42 L/min
Outlet: ¾" - 1"
Inlet: ¾" - 1"



Product Features

- Compact design and easy installation.
- High performance and low noise.
- Brass-made impeller with better resistance to high temperatures and friction.
- Plastic pump body to ensure the safety and hygiene of the water quality.
- Built-in thermal overload protector.

Dimensions

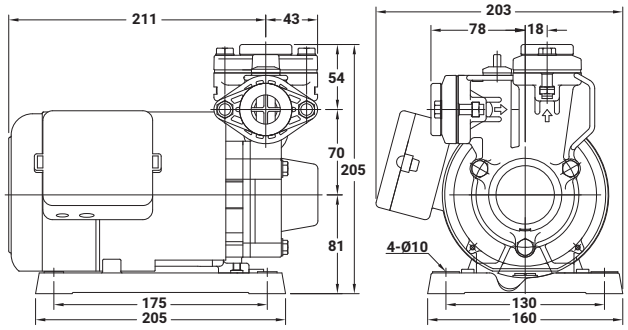

Applications

Ideal for pumping clean, non-volatile liquids without fibres or solids in such applications as:

- The water supply for apartment and residences
- Portable water supply or underground
- Irrigation
- Washing/cleaning system

Operating Conditions


- Ambient temperature: Max. +40°C
- Liquid temperature: +4°C ~ +40°C
- Suction head: Max. 8 M


Standard Mode

TP320P T B

- B — Antimicrobial
- T — Temperature control(Optional)
- TP320P — Model name

Performance Curve

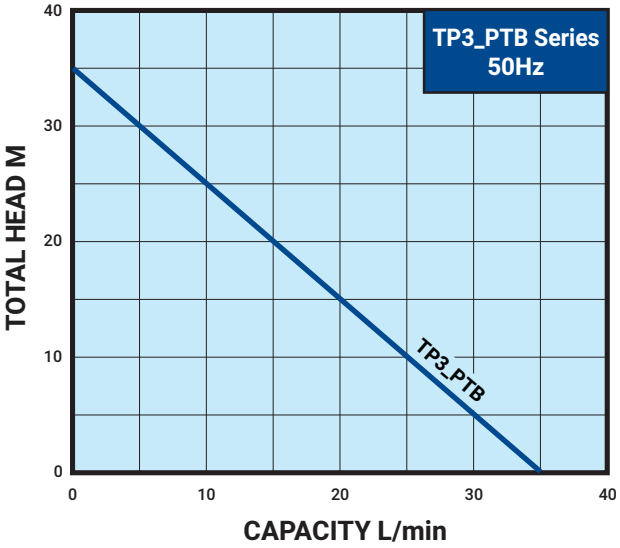

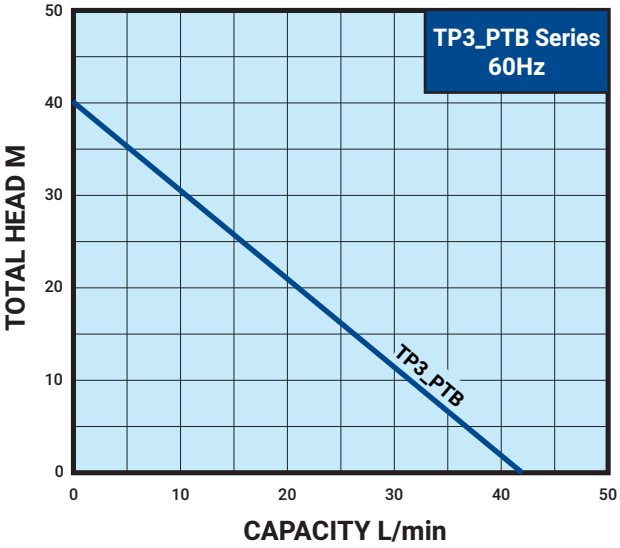



TP3_PTB Series 50Hz

Model	Power kW	Cycle Hz	Phase Ø	Volt V	Amp's A	Inlet in.	Outlet in.	H max. m	Q max. L/min	N.W. kg	G.W. kg	
TP320P(T)B	0.37	50	1	200 - 240	2.7	¾"	¾"	35	35	6.7	7.4	72
TP325P(T)B	0.37	50	1	200 - 240	2.7	1"	1"	35	35	6.7	7.4	72



TP3_PTB Series 60Hz

Model	Power kW	Cycle Hz	Phase Ø	Volt V	Amp's A	Inlet in.	Outlet in.	H max. m	Q max. L/min	N.W. kg	G.W. kg	
TP320P(T)B	0.37	60	1	110/220	5.2/2.6	¾"	¾"	40	42	6.7	7.3	72
TP325P(T)B	0.37	60	1	110/220	5.2/2.6	1"	1"	40	42	6.7	7.3	72

WALRUS PUMP

WALRUS PUMP CO., LTD.

Head office : No.83-14, Dapiantou, Sanzhi Dist.,
New Taipei City 252, Taiwan
Tel : (+886) 2 2636-1123~7
Fax : (+886) 2 8635-2660
Email : walrus.sales@walrus.com.tw

All specifications are subject to change without notice. TP3PTB-EN000b-202309

bsi. ISO 9001 品質管理系統

Walrus Pump V 2.0 RoHS