TPH_Q Series Booster Pump

50 Hz

Power: 370 - 1100 W
Head: Up to 56 M
Flow: Up to 160 L/min
Outlet: 1" - 1"
Inlet: 1" - 1 1/4"



Construction Industry
Agriculture & Fishing Industry
Manufacturing Industry
Electricity & New Energy Industry
Entertainment & Leisure Industry
Accommodation & Food Service Industry
Wholesale & Retail Industry
Water Supply & Pollution Control
Service Industry

Product Features

- Quiet Operation
- Easy installation
- Anti-cycling
- Dry-running protection
- Automatically starts and stops the pump based on demand


Applications


- Domestic water supply
- Air-conditioning system
- Automatic booster system
- Irrigation

Electrical Data 50Hz / Single Phase

Model	Power W	Horse Power HP	Pipe Connection Inlet x Outlet	Ampere A	Rate / Max Head m	Rate / Max Flow m³/h	Maximum Support Concurrent Usage
TPH2T3KQ	370	1/2	1" x 1"	2.5	18 / 28	2.3 / 4.7	1x 2x
TPH2T4KQ	370	1/2	1" x 1"	2.9	27 / 38	2.0 / 4.4	1x 3x
TPH2T5KQ	550	3/4	1" x 1"	4.0	30 / 46	2.0 / 4.4	4x
TPH2T6KQ	550	3/4	1" x 1"	4.3	40 / 56	2.0 / 4.4	3x 2x
TPH4T4KQ	750	1	1 1/4" x 1"	5.7	28 / 38	4.0 / 9.4	2x 4x
TPH4T5KQ	750	1	1 1/4" x 1"	6.9	34 / 46	4.0 / 9.4	1x 5x
TPH4T6KQ	1100	1 1/3	1 1/4" x 1"	7.7	40 / 55	4.0 / 10	7x

Performance Curve

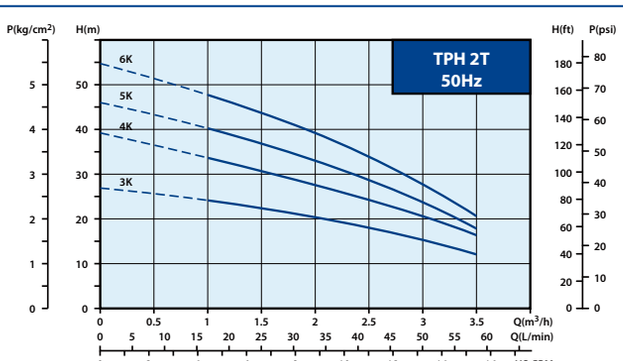

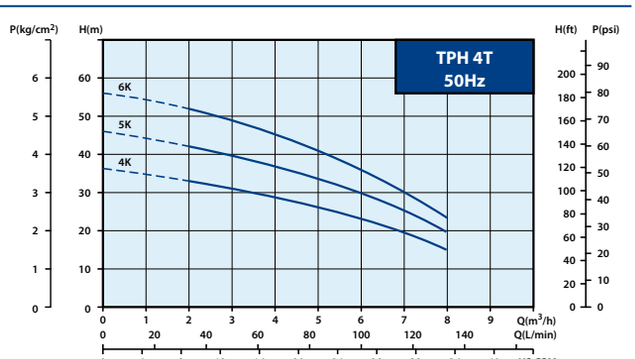

© 2024Walrus Pump Co., Ltd. All rights reserved.